B model

Concrete, mortar and screed - on demand and ready for growth.

Wheel-mounted mobile concrete batching plant with 2 hoppers.

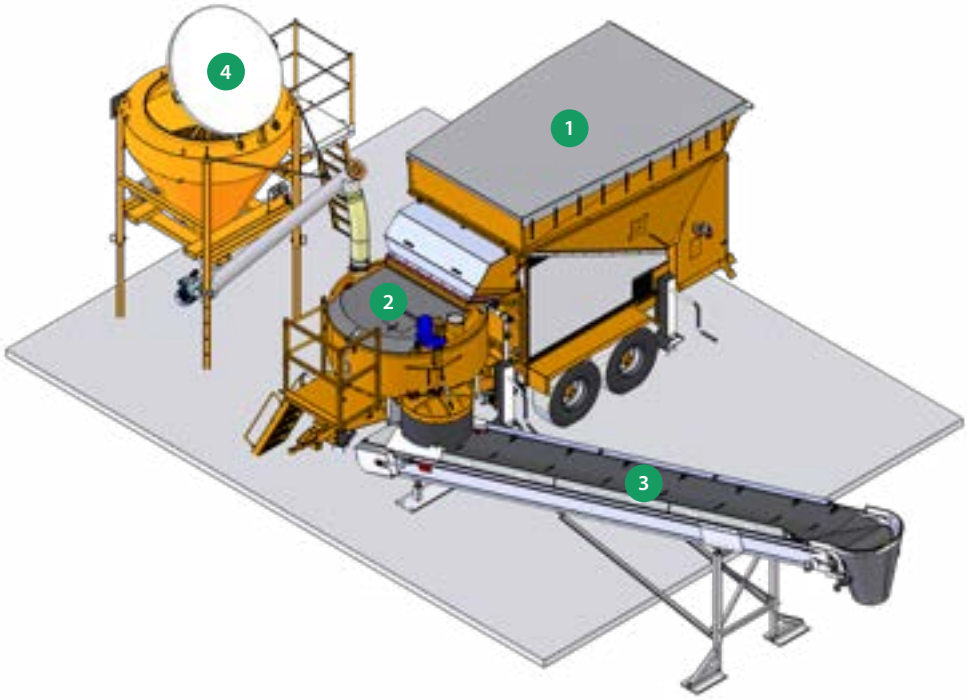

1 Aggregate hoppers 2 Pan mixer 3 Conveyor belt 4 Cement silo

B model specifications

The B-model is a mobility batching plant
that we combine with any number of hoppers and options.

MODEL	B500	B1200	B1800
PERFORMANCE			
Volume (Gross / Net) L	500 / 300	1200 / 800	1800 / 1100
Capacity m^3 per hour	3 - 5	10 - 16	20 - 30
Motor kW	7,5	18.5	30
Sound pressure level dB (A)	77.7	77.7	77.7
Mixing arms: side scrapers No	4:1	6:1	6:1
Recipes No	60	60	60
WEIGHING AND DOSING			
Load cells Kg	3 x 5,000	3 x 5,000	3 x 5,000
Weighing accuracy %	+/- 0.5	+/- 0.5	+/- 0.5
Dosing accuracy %	+/- 3	+/- 3	+/- 3
AGGREGATES AND WATER			
Aggregate hopper m^3	2 x 2.4	2 x 2.4	2 x 2.4
Aggregate hopper extended m^3	2 x 3.9	2 x 3.9	2 x 3.9
Water tank L	500	500	500
DIMENSIONS AND WEIGHT			
Dimension (W x H x L) m	2.5 x 2.7 x 5.5	2.5 x 2.7 x 5.9	2.7 x 2.7 x 6.4
With extended hoppers m	2.5 x 3.2 x 5.6	2.5 x 3.2 x 6.0	2.7 x 2.7 x 6.5
Transport Dimension (W x H x L) m	2.5 x 2.7 x 5.5	2.5 x 2.7 x 5.9	2.5 x 2.7 x 6.4
Weight Kg	4,500	6,500	7,500
POWER			
Supply Voltage	3 x 400V N PE 50Hz	3 x 400V N PE 50Hz	3 x 400V N PE 50Hz
Power A/KVA	25 / 18	63 / 45	80 / 55
Socket inlet	CEE 32A 5P 230/400V	CEE 65A 5P 230/400V	CEE 125A 5P 230/400V

Let's talk
Your concrete solutions strats here

+45 97 17 16 66
www.fibointercon.com