C model

Concrete, mortar and screed - on demand and ready for growth.

Mobile batching plant with two hoppers,
built on a container frame for easy transport by hook-lift truck.

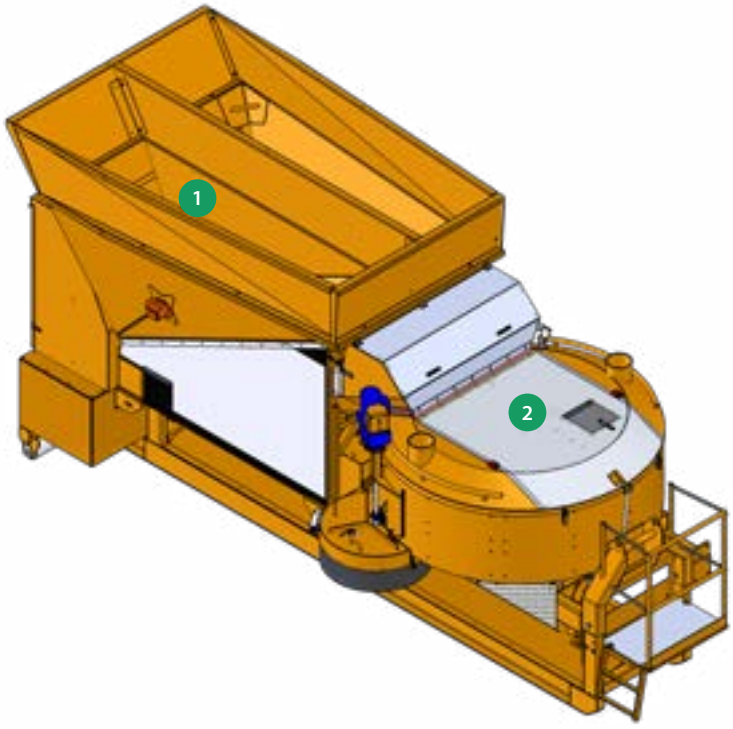

1 Aggregate hoppers 2 Pan mixer

C model specifications

Unloaded from the back of a truck, this batching plant can comfortably be positioned and quickly made operational at jobsites.

MODEL	C1200	C1800	C2200
PERFORMANCE			
Volume (Gross / Net) L	1200 / 800	1800 / 1100	2200/1400
Capacity m^3 per hour	10 - 16	20 - 30	25-45
Motor kW	18.5	30	55
Sound pressure level dB (A)	77.7	77.7	77,7
Mixing arms: side scrapers No	6:1	6:1	8:1
Recipes No	60	60	60
WEIGHING AND DOSING			
Load cells Kg	3 x 5,000	3 x 5,000	3 x 5,000
Weighing accuracy %	+/- 0.5	+/- 0.5	+/- 0.5
Dosing accuracy %	+/- 3	+/- 3	+/- 3
AGGREGATES AND WATER			
Aggregate hopper m^3	2 x 2.4	2 x 2.4	2 x 2.4
Aggregate hopper extended m^3	2 x 3.9	2 x 3.9	2 x 3.9
Water tank L	500	500	500
DIMENSIONS AND WEIGHT			
Dimension (W x H x L) m	2.3 x 2.6 x 5.6	2.3 x 2.6 x 6.0	2.5 x 2.6 x 6.2
With extended hoppers m	2.5 x 3.1 x 6.3	2.5 x 3.1 x 6.5	3.7 x 3.1 x 6.3
Transport Dimension (W x H x L) m	2.3 x 2.6 x 5.6	2.3 x 2.6 x 6.0	2.5 x 2.6 x 6.2
Weight Kg	7,000	9,000	10,000
POWER			
Supply Voltage	3 x 400V N PE 50Hz	3 x 400V N PE 50Hz	3 x 400V N PE 50Hz
Power A/KVA	63 / 45	80 / 55	125 / 86
Socket inlet	CEE 63A 5P 230/400V	CEE 125A 5P 230/400V	CEE 125A 5P 230/400V

Let's talk
Your concrete solutions strats here

+45 97 17 16 66
www.fibointercon.com