F model

Concrete, mortar and screed - on demand and ready for growth.

The F model is built on a solid frame with legs, making it great for setting up for a longer period in one location.

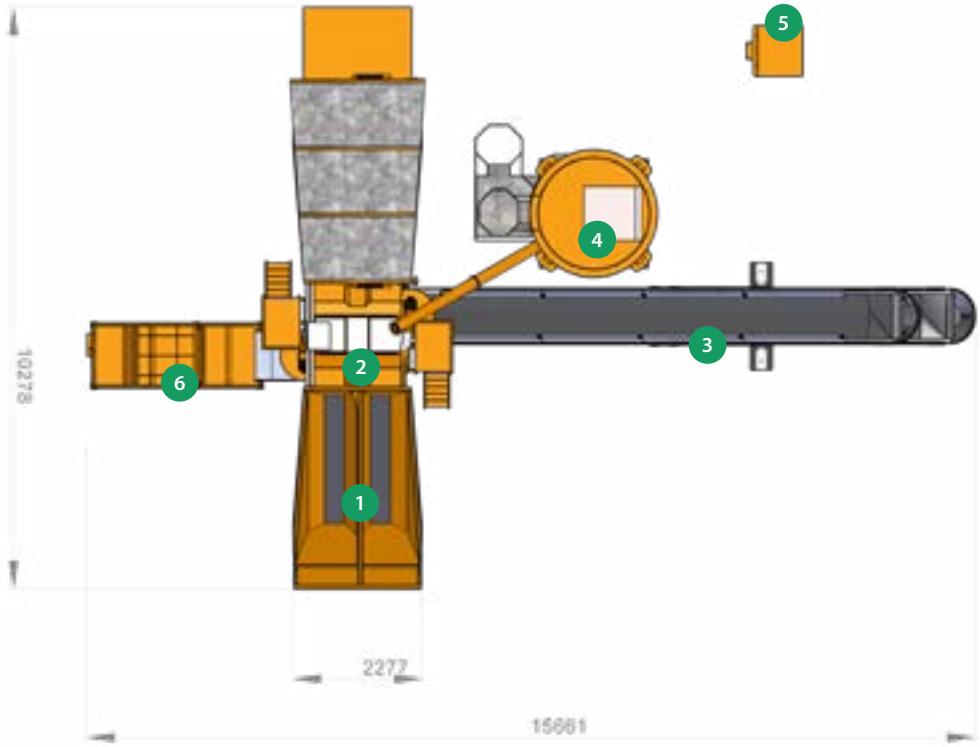

1 Aggregate hoppers
2 Pan mixer
3 Conveyor belt
4 Cement silo
5 Payment
6 Washout water recycling

F model specifications

The F model features 4 hoppers and allows for a wide variety of high-quality concretes and mortars to be produced.

MODEL	F1200	F1800	F2200
PERFORMANCE			
Volume (Gross / Net) L	1200 / 800	1800 / 1100	2200/1400
Capacity m^3 per hour	10 - 16	20 - 30	25-45
Motor kW	18.5	30	55
Sound pressure level dB (A)	77.7	77.7	77,7
Mixing arms: side scrapers No	6:1	6:1	8:1
Recipes No	60	60	60
WEIGHING AND DOSING			
Load cells Kg	3 x 5,000	3 x 5,000	3 x 5,000
Weighing accuracy %	+/- 0.5	+/- 0.5	+/- 0.5
Dosing accuracy %	+/- 3	+/- 3	+/- 3
AGGREGATES AND WATER			
Aggregate hopper m^3	4 x 2.4	4 x 2.4	4 x 2.4
Aggregate hopper extended m^3	4 x 3.9	4 x 3.9	4 x 3.9
Water tank L	500	500	500
DIMENSIONS AND WEIGHT			
Dimension (W x H x L) m	3.0 x 2.6 x 8.5	3.4 x 2.6 x 8.8	2.5 x 2.6 x 9.1
With extended hoppers m	3.0 x 3.1 x 8.9	3.4 x 3.1 x 9.3	3.7 x 3.1 x 9.6
Transport Dimension (W x H x L) m	2.3 x 2.6 x 8.5	2.3 x 2.6 x 8.8	2.5 x 2.6 x 9.1
Weight Kg	7,500	9,500	10,500
POWER			
Supply Voltage	3 x 400V N PE 50Hz	3 x 400V N PE 50Hz	3 x 400V N PE 50Hz
Power A/KVA	63 / 45	80 / 55	125 / 86
Socket inlet	-	-	-

Let's talk
Your concrete solutions strats here

+45 97 17 16 66
www.fibointercon.com