FP model

Concrete, mortar and screed - on demand and ready for growth.

Increase production capacity without increasing operational complexity.

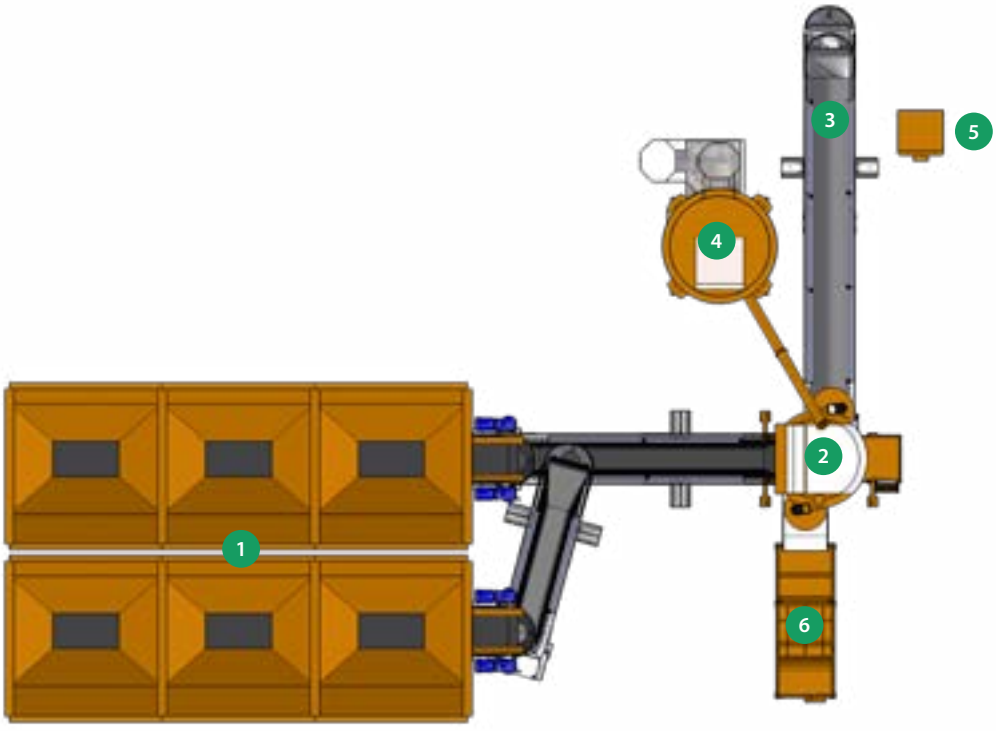

1 Aggregate hoppers
2 Pan mixer
3 Conveyor belt
4 Cement silo
5 Payment
6 Washout water recycling

FP model specifications

The FP-model is a stand-alone batching plant
that we combine with any number of hoppers and options.

MODEL	FP1200	FP1800	FP2200
PERFORMANCE			
Volume (Gross / Net) L	1200 / 800	1800 / 1100	2200/1400
Capacity m^3 per hour	10 - 16	20 - 30	25-45
Motor kW	18.5	30	55
Sound pressure level dB (A)	77.7	77.7	77,7
Mixing arms: side scrapers No	6:1	6:1	8:1
Recipes No	60	60	60
WEIGHING AND DOSING			
Load cells Kg	3 x 5,000	3 x 5,000	3 x 5,000
Weighing accuracy %	+/- 0.5	+/- 0.5	+/- 0.5
Dosing accuracy %	+/- 3	+/- 3	+/- 3
AGGREGATES AND WATER			
Aggregate hopper m^3	-	-	-
Aggregate hopper extended m^3	-	-	-
Water tank L	500	500	500
DIMENSIONS AND WEIGHT			
Dimension (W x H x L) m	2.3 x 2.6 x 2.8	2.5 x 2.6 x 3.4	3.7 x 2.6 x 2.9
With extended hoppers m	-	-	-
Transport Dimension (W x H x L) m	2.3 x 2.6 x 2.2	2.5 x 2.6 x 3.4	2.5 x 2.6 x 2.9
Weight Kg	3,500	5,000	6,500
POWER			
Supply Voltage	3 x 400V N PE 50Hz	3 x 400V N PE 50Hz	3 x 400V N PE 50Hz
Power A/KVA	63 / 45	80 / 55	125 / 86
Socket inlet	-	-	-

Let's talk
Your concrete solutions strats here

+45 97 17 16 66
www.fibointercon.com