FS model

Concrete, mortar and screed - on demand and ready for growth.

A compact concrete solution ideal for smaller yards and controlled investment.

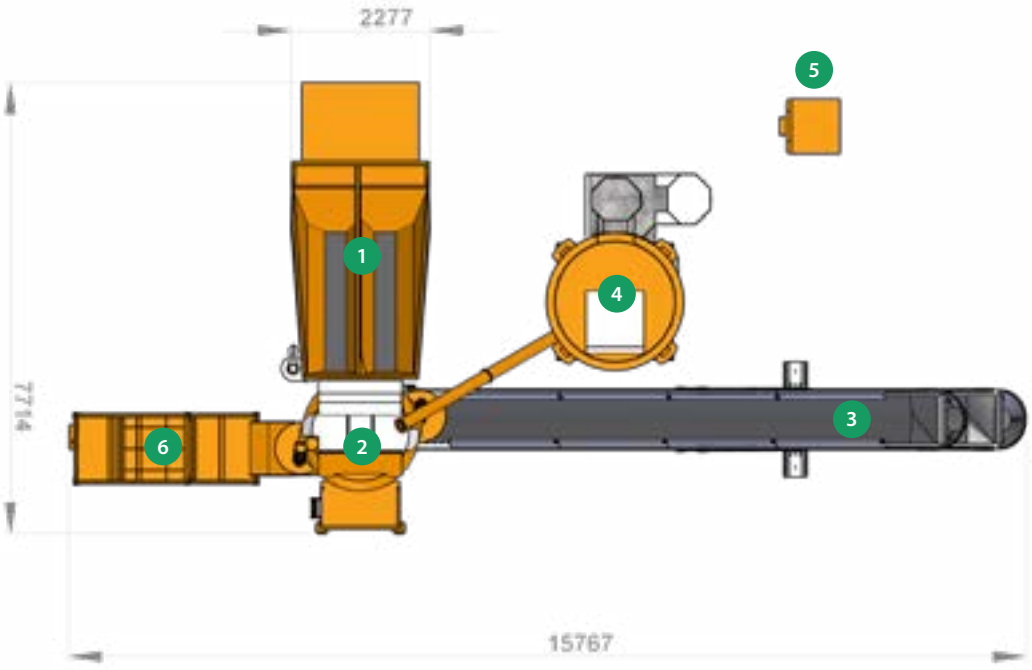

1 Aggregate hoppers
2 Pan mixer
3 Conveyor belt
4 Cement silo
5 Payment
6 Washout water recycling

FS model specifications

The FS model is an ideal model where space is scarce and where the breadth of quality mixes required is limited – 1 hopper for sand and 1 hopper for gravel.

MODEL	FS500	FS1200	F1800	F2200
PERFORMANCE				
Volume (Gross / Net) L	500 / 300	1200 / 800	1800 / 1100	2200/1400
Capacity m^3 per hour	3 - 5	10 - 16	20 - 30	25-45
Motor kW	7,5	18.5	30	55
Sound pressure level dB (A)	77.7	77.7	77.7	77.7
Mixing arms: side scrapers No	4:1	6:1	6:1	8:1
Recipes No	60	60	60	60
WEIGHING AND DOSING				
Load cells Kg	3 x 5,000	3 x 5,000	3 x 5,000	3 x 5,000
Weighing accuracy %	+/- 0.5	+/- 0.5	+/- 0.5	+/- 0.5
Dosing accuracy %	+/- 3	+/- 3	+/- 3	+/- 3
AGGREGATES AND WATER				
Aggregate hopper m^3	2 x 2.4	2 x 2.4	2 x 2.4	2 x 2.4
Aggregate hopper extended m^3	2 x 3.9	2 x 3.9	2 x 3.9	2 x 3.9
Water tank L	500	500	500	500
DIMENSIONS AND WEIGHT				
Dimension (W x H x L) m	2.3 x 2.6 x 5.5	2.5 x 2.6 x 5.9	3.0 x 2.6 x 6.4	3.7 x 2.6 x 6.1
With extended hoppers m	2.3 x 3.1 x 5.6	2.5 x 3.1 x 6.0	2.7 x 3.1 x 6.5	3.7 x 3.1 x 6.1
Transport Dimension (W x H x L) m	2.3 x 2.6 x 5.2	2.3 x 2.6 x 5.6	2.3 x 2.6 x 6.1	2.5 x 2.6 x 6.1
Weight Kg	3,500	5,500	7,500	8,500
POWER				
Supply Voltage	3 x 400V N PE 50Hz	3 x 400V N PE 50Hz	3 x 400V N PE 50Hz	3 x 400V N PE 50Hz
Power A/KVA	25 / 18	63 / 45	80 / 55	125 / 86
Socket inlet	-	-	-	-

Let's talk
Your concrete solutions strats here

+45 97 17 16 66
www.fibointercon.com