T model

Concrete, mortar and screed - on demand and ready for growth.

Quick to set up. Easy to relocate. Simply connect electricity and water, fill the hoppers with sand and gravel – and you're ready to produce.

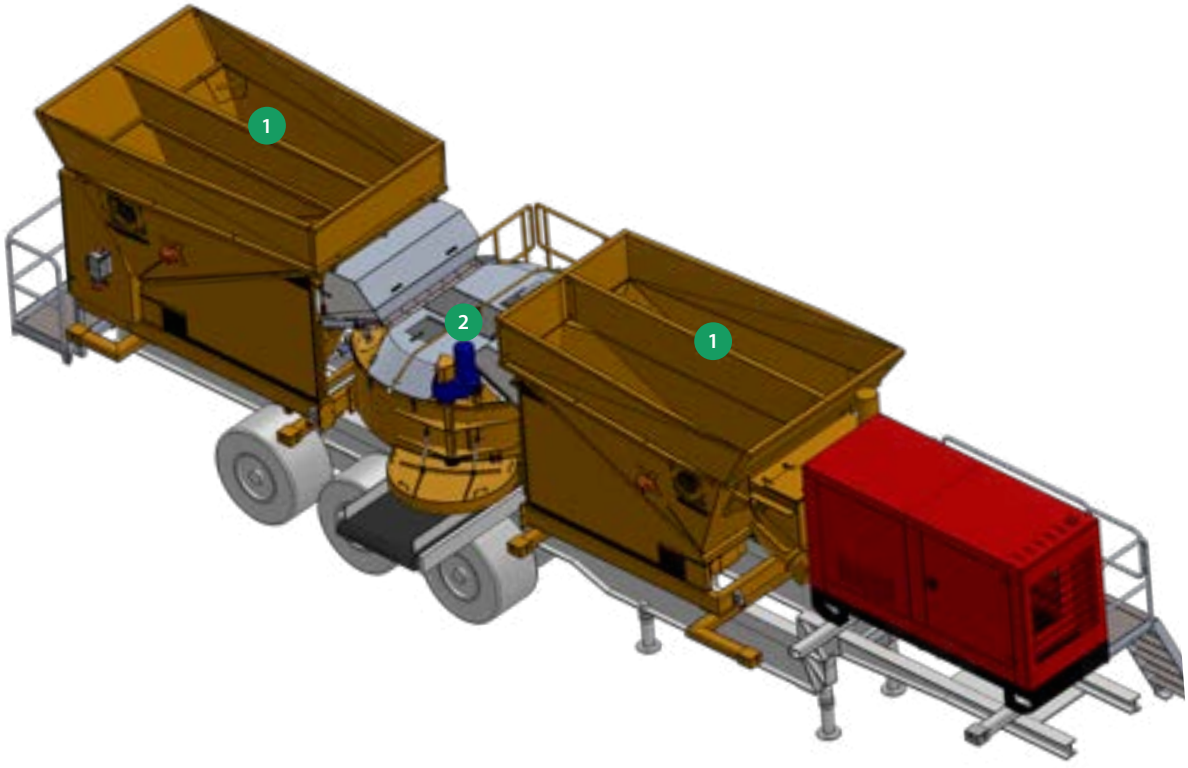

1 Aggregate hoppers 2 Pan mixer

T model specifications

The T-model delivers reliable concrete production
and can be transported easily by truck from one project to the next.

MODEL	T1200	T1800	T2200
PERFORMANCE			
Volume (Gross / Net) L	1200 / 800	1800 / 1100	2200/1400
Capacity m^3 per hour	10 - 16	20 - 30	25-45
Motor kW	18.5	30	55
Sound pressure level dB (A)	77.7	77.7	77,7
Mixing arms: side scrapers No	6:1	6:1	8:1
Recipes No	60	60	60
WEIGHING AND DOSING			
Load cells Kg	3 x 5,000	3 x 5,000	3 x 5,000
Weighing accuracy %	+/- 0.5	+/- 0.5	+/- 0.5
Dosing accuracy %	+/- 3	+/- 3	+/- 3
AGGREGATES AND WATER			
Aggregate hopper m^3	4 x 2.4	4 x 2.4	4 x 2.4
Aggregate hopper extended m^3	4 x 3.9	4 x 3.9	4 x 3.9
Water tank L	500	500	500
DIMENSIONS AND WEIGHT			
Dimension (W x H x L) m	3.0 x 2.0 x 8.5	3.4 x 2.0 x 8.8	3.7 x 2.0 x 9.1
With extended hoppers m	3.0 x 2.5 x 8.9	3.4 x 2.5 x 9.3	3.7 x 2.5 x 9.6
Transport Dimension (W x H x L) m	2.5 x 2.0 x 8.5	2.5 x 2.0 x 8.8	2.5 x 2.0 x 9.1
Weight Kg	7,500	9,500	10,55
POWER			
Supply Voltage	3 x 400V N PE 50Hz	3 x 400V N PE 50Hz	3 x 400V N PE 50Hz
Power A/KVA	63 / 45	80 / 55	125 / 86
Socket inlet	CEE 65A 5P 230/400V	CEE 65A 5P 230/400V	CEE 65A 5P 230/400V

Let's talk
Your concrete solutions strats here

+45 97 17 16 66
www.fibointercon.com