TS model

Concrete, mortar and screed - on demand and ready for growth.

The container twist lock system makes is easy
to move the plant between building projects.

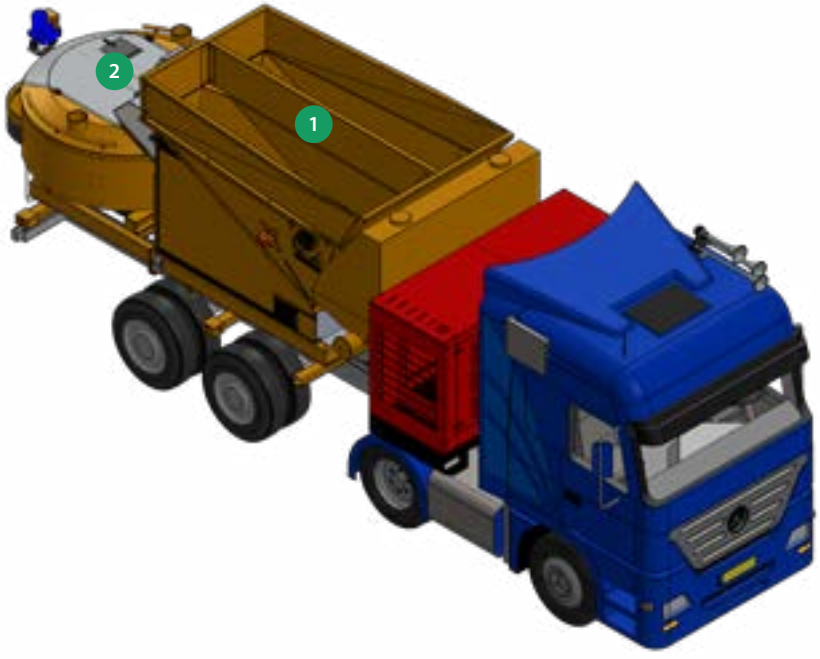

1 Aggregate hoppers 2 Pan mixer

TS model specifications

The TS-model can replace a small concrete factory
as it can handle even larger construction projects.

MODEL	TS1200	TS1800	TS2200
PERFORMANCE			
Volume (Gross / Net) L	1200 / 800	1800 / 1100	2200/1400
Capacity m^3 per hour	10 - 16	20 - 30	25-45
Motor kW	18.5	30	55
Sound pressure level dB (A)	77.7	77.7	77,7
Mixing arms: side scrapers No	6:1	6:1	8:1
Recipes No	60	60	60
WEIGHING AND DOSING			
Load cells Kg	3 x 5,000	3 x 5,000	3 x 5,000
Weighing accuracy %	+/- 0.5	+/- 0.5	+/- 0.5
Dosing accuracy %	+/- 3	+/- 3	+/- 3
AGGREGATES AND WATER			
Aggregate hopper m^3	2 x 2.4	2 x 2.4	2 x 2.4
Aggregate hopper extended m^3	2 x 3.9	2 x 3.9	2 x 3.9
Water tank L	500	500	500
DIMENSIONS AND WEIGHT			
Dimension (W x H x L) m	2.5 x 2.0 x 5.5	2.5 x 2.0 x 5.9	3.0 x 2.0 x 6.4
With extended hoppers m	2.5 x 2.5 x 5.6	2.5 x 2.5 x 6.0	2.7 x 2.5 x 6.5
Transport Dimension (W x H x L) m	2.5 x 2.0 x 5.2	2.5 x 2.0 x 5.6	2.5 x 2.0 x 6.1
Weight Kg	5,500	7,500	8,500
POWER			
Supply Voltage	3 x 400V N PE 50Hz	3 x 400V N PE 50Hz	3 x 400V N PE 50Hz
Power A/KVA	63 / 45	80 / 55	125 / 86
Socket inlet	CEE 65A 5P 230/400V	CEE 125A 5P 230/400V	CEE 125A 5P 230/400V

Let's talk
Your concrete solutions strats here

+45 97 17 16 66
www.fibointercon.com